

## "T" Series Booster Splitters

- \* Fully Compatible with the Sky Digital tvLINK System
- \* Powered from digibox or separate PSU
- \* High Performance
- \* Compact Design

### PRODUCT DESCRIPTION


The NEW "T" Series tvLINK compatible TV Booster Splitters are designed to amplify the TV signals in a poor signal area, as well as distributing the TV signals, including the Sky Digital channel around the home.

The T120 & T140 (2Way & 4Way) can either be powered by the Sky digibox or via separate mains power supply. The T180 (8Way) can only be powered by the mains power supply.

Each booster is designed to carry the return signal from the tvLINK back to the Sky digibox. This enables the viewer to watch & control from several locations.

#### Options available:

- T120 2Way
- T140 4Way
- T180 8Way (must be mains powered)

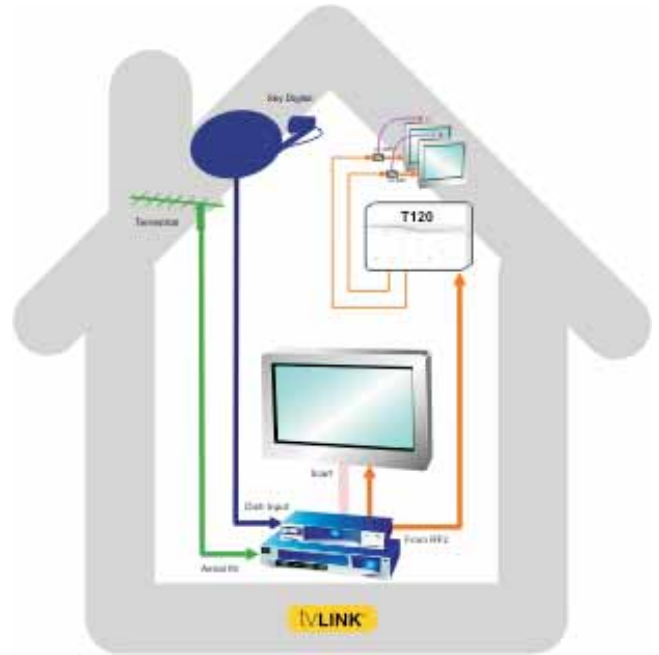

### PRODUCT SPECIFICATION

	T120	T140	T180
Freq. Range (MHz).....	47-860MHz	47-860MHz	47-860MHz
No. Outputs.....	2	4	8
Gain @ 8V Supply (dB).....	6	6	-
Gain @ 12V Supply (dB).....	7	7	8
Noise Fig. (dB).....	3	3	4
Output Capability @ 8V (dBuV).....	80	78	-
Output Capability @ 12V (dBuV).....	85	84	85
Isolation between Outputs (dB).....	25	25	25
Input return Loss (dB).....	9	7	8
Output Return Loss (dB).....	8	7	7
tvLINK Compatible.....	YES	YES	YES
Power requirements.....	DigiboxRF2/Mains	DigiboxRF2	MAINS
Connectors.....	IEC Female	IEC Female	IEC Female
Indoor or Outdoor Use.....	Indoor	Indoor	Indoor

### PRODUCT RANGE

tvLINK, tvLINKplus, 2Way, 4Way, & 7WayDA, 2/4Way DA/F, 2Way DA/EXT, Diplexers  
Bypass Kit, Loftbox, Wallplates

www.globalcom.co.uk www.tvlink.co.uk